

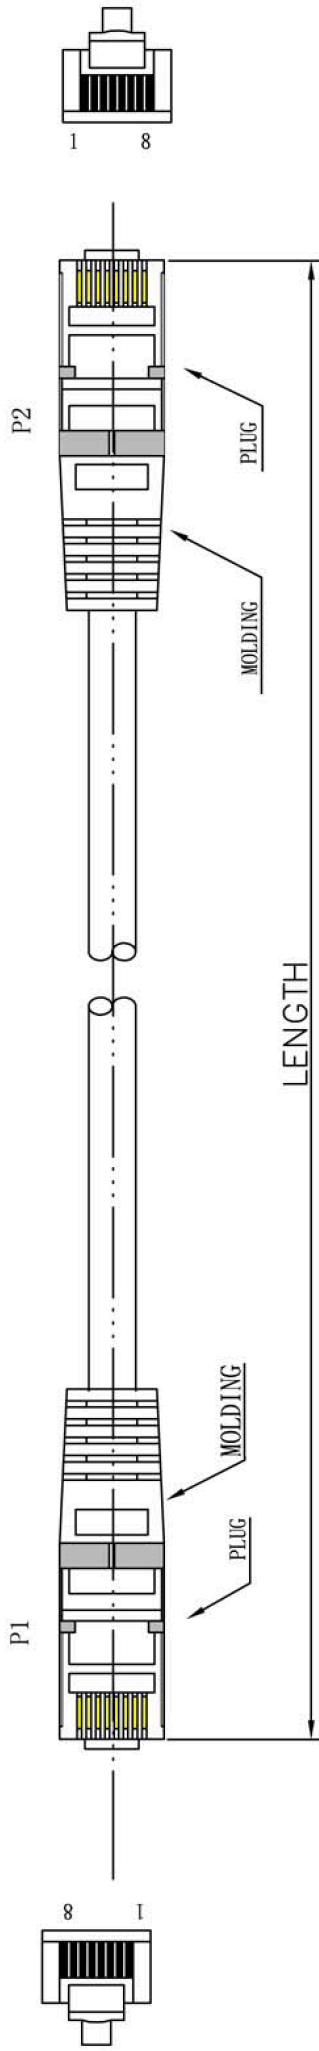


DATE	REV	DESCRIPTION	BY	CHKD
10/27	A/O	NEW		



Marking:<LP009>      FTP CAT.5E PATCH ISO/IEC 11801 & EN 50288 3P VERIFIED FOR  
GIGABIT ETHERNET    26AWGX4P TYPE CM (UL) CMH E164469-F3

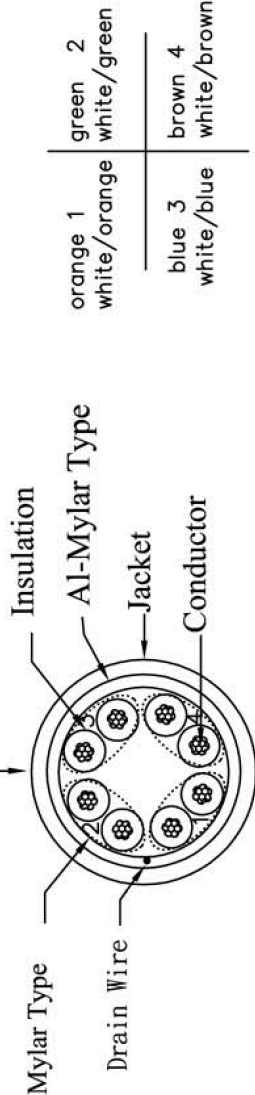


orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

Conductor	Bare Copper 26AWG 7/0.152±0.005mm
Insulation	Thickness MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.86±0.06mm
Jacketing	PVC Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:5.6±0.2mm

WIRE	CAT.5E FTP STR 26AWG
PLUG	YS-01
Length	1.0M
WIRE COLOR	

ROHS Compliant

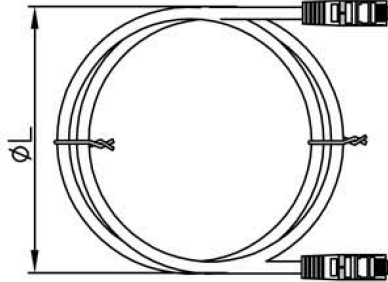

Unless specified on the drawing, tolerances are per the follows:  
± 1  
.X ± 0.2  
.XX ± 0.05



PA/R	PINOUT	
	P1 (T568B)	P2 (T568B)
1	1	1
	2	2
	3	3
2	6	6
	4	4
3	5	5
	7	7
4	8	8

DRAW.NO	00105	ITEM	
DEPARTMENT	R&D	DRAW	2008/10/27
SCALE		CHECKER	APPROVAL
UNIT	MM	SHEET	1 OF 1